

TOX

GERMANY

Spaced mounting system

Thermo Proof Wood Mini




Features

- Specifically for wood frame construction with insulation made of 50-80 mm wood fibre insulation boards
- Simple and rapid installation
- Variable connection options (M10 external thread, M6 internal thread or screws with \varnothing 3 - 4.5 mm)
- No pressure load on the façade
- Slim head geometry for invisible fastening

Description & Field of Application

- The Thermo Proof Wood Mini is a spaced mounting system for fastening light loads to timber frame construction buildings with 50-80 mm plaster base boards
- Iso Spacer prevents pressure from being applied to the façade
- **When used with M10 installation threaded rod**
Fastening of e.g. downpipe clips
- **When used without installation threaded rod**
Fastening of attachments with M6 threaded screws
- **When used without installation threaded rod and Barracuda 5/25**
Fastening of attachments with screws with \varnothing 3 - 4.5 mm

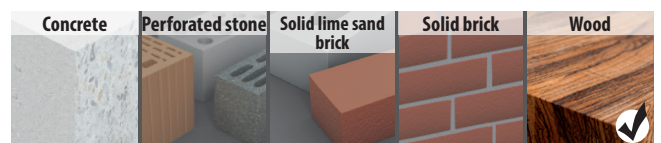

Please note: Subject to change without notice. Liability for printing errors and mistakes is excluded.

TOX-Dübel-Technik GmbH

Brunnenstraße 31 ■ 72505 Krauchenwies ■ www.tox.de ■ info@tox.de

Phone +49 (0) 7576 / 9295-0 ■ Fax +49 (0) 7576 / 9295-190

Technical hotline: +49 (0) 7576 / 9295-123 ■ technik@tox.de

toxgermany - Follow us on



YouTube




Spaced mounting system


Thermo Proof Wood Mini

Processing & Installation


Installation

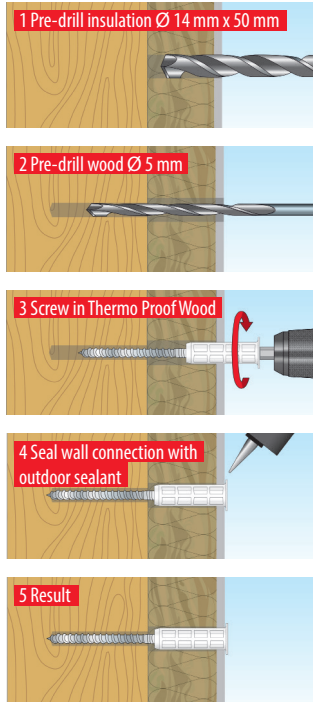



Fastening option A

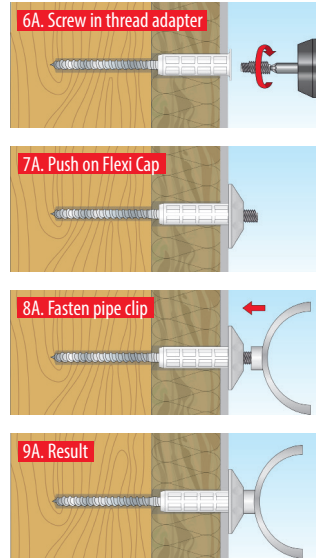

Fastening option B

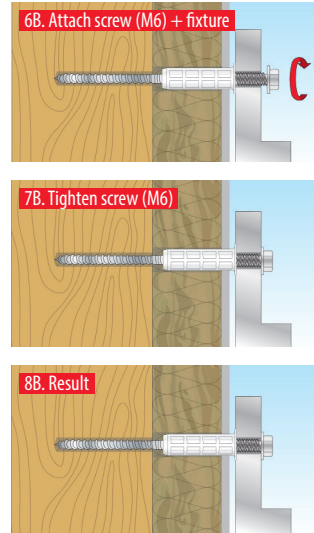

Fastening option C

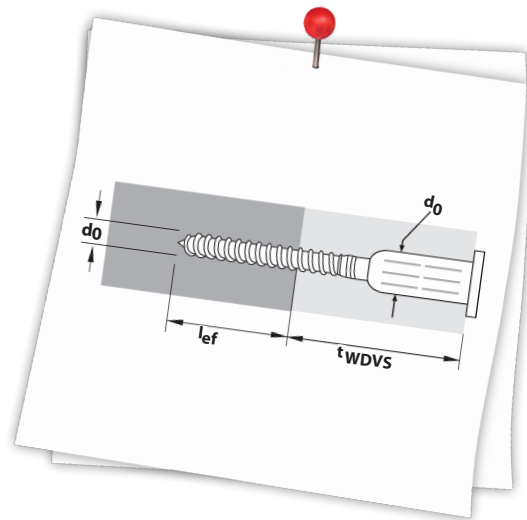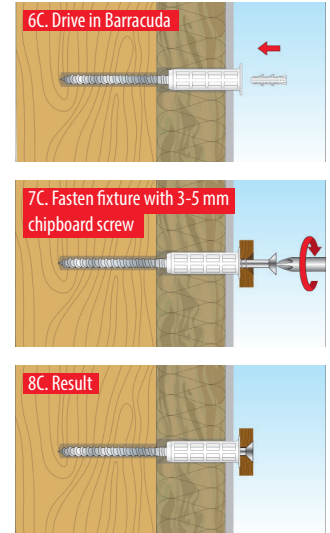

Packaging	Item no.	Type	Content	Size	Drill Ø	Min. anchoring depth	Insulation layer thickness	Approval	EAN
	073 600 321	Thermo Proof Wood Mini M8x 110/50-80	per pack 2x Thermo Proof Wood Mini 2x Barracuda 2x thread adapter 2x Flexi Cap 1x bit	per pack 2x Thermo Proof Wood Mini 2x Barracuda 2x thread adapter 2x Flexi Cap 1x bit	Ø x L M8x110 5/25 M6/10 M10/40 TX50	d ₀ /d ₁ Ø mm 5/14	l mm ≥ 30	t _{etics} mm 50-80	Dibt -



Please note: Subject to change without notice. Liability for printing errors and mistakes is excluded.

TOX-Dübel-Technik GmbH

Brunnenstraße 31 ▪ 72505 Krauchenwies ▪ www.tox.de ▪ info@tox.de

Phone +49 (0) 7576 / 9295-0 ▪ Fax +49 (0) 7576 / 9295-190

Technical hotline: +49 (0) 7576 / 9295-123 ▪ technik@tox.de

toxgermany - Follow us on



YouTube

6.00.604.48-1.03N