

TOX

GERMANY

Spaced mounting system

Thermo Proof Wood





Features

- Heavy-duty spaced mounting system for timber frame construction and wooden buildings with insulation
- Stainless steel hanger bolt
- Simple and rapid installation
- Infinitely adjustable Iso Spacer insulation sleeve
- No pressure load on the façade
- Practically no energy loss

Description & Field of Application

- The Thermo Proof Wood is a heavy-duty spaced mounting system for timber construction or timber frame construction houses
- The Thermo Proof Wood is available in three lengths for the standard insulation thicknesses of 60 mm, 80 mm and 100-120 mm
- The hanger bolt with hexagonal socket drive enables a small fastening structure as required for cassette awnings
- Iso Spacer with large contact surface prevents pressure on the façade
- After installation, the gap between Iso Spacer and plaster should be sealed with an outdoor sealant

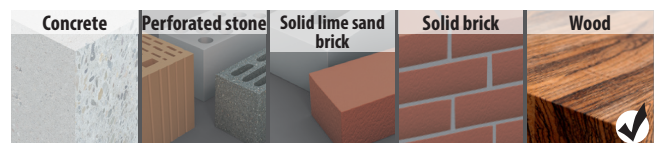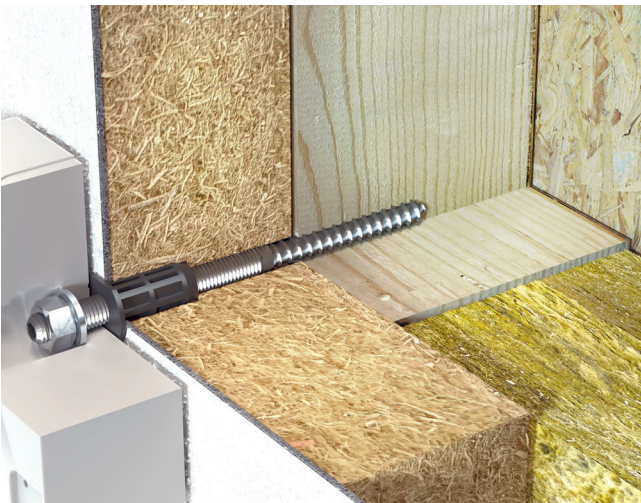

Please note: Subject to change without notice. Liability for printing errors and mistakes is excluded.

TOX-Dübel-Technik GmbH

Brunnenstraße 31 ■ 72505 Krauchenwies ■ www.tox.de ■ info@tox.de

Phone +49 (0) 7576 / 9295-0 ■ Fax +49 (0) 7576 / 9295-190

Technical hotline: +49 (0) 7576 / 9295-123 ■ technik@tox.de

toxgermany - Follow us on





YouTube



Spaced mounting system

Thermo Proof Wood

Processing & Installation

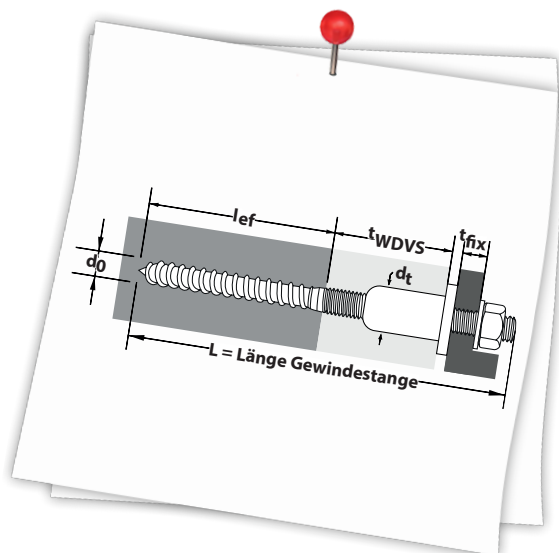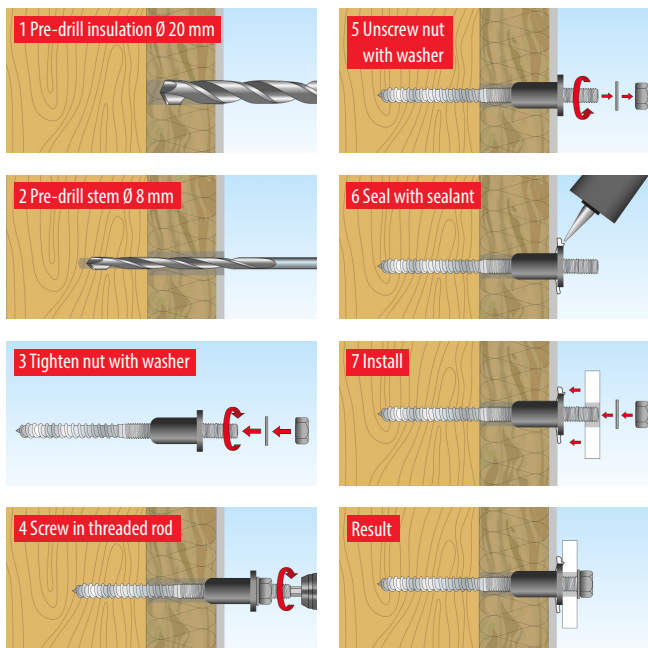

Packaging	Item no.	Type	Content	Drill Ø	Min. anchoring depth	Fixture thickness	Insulation layer thickness	Approval	EAN
	Thermo Proof Wood	per pack	per pack	d_0 / d_t Ø mm	l_{ef} mm	$t_{fx} \leq$ mm	t_{etics} mm	Dibt	
	073 671 061	M12x170/60	2x and 1x bit each	8/20	70	20	60	-	4 049563 049862
	073 671 081	M12x190/80	2x and 1x bit each	8/20	70	20	80	-	4 049563 049879
	073 671 121	M12x230/100-120	2x and 1x bit each	8/20	90/70	20	100/120	-	4 049563 049886

TOX-Dübel-Technik GmbH

Brunnenstraße 31 ▪ 72505 Krauchenwies ▪ www.tox.de ▪ info@tox.de

Phone +49 (0) 7576 / 9295-0 ▪ Fax +49 (0) 7576 / 9295-190

Technical hotline: +49 (0) 7576 / 9295-123 ▪ technik@tox.de

toxgermany - Follow us on



YouTube